

How to assemble

City bike



Rather see it in 3D and hear each step?

Point your phone camera at the code. The manual opens on your phone, shows each step in 3D and reads it aloud.


1

Unbox the bike

Lift the bike out of the box with care. Cut the cable ties and take the foam guards off the frame.



Scan to hear this step

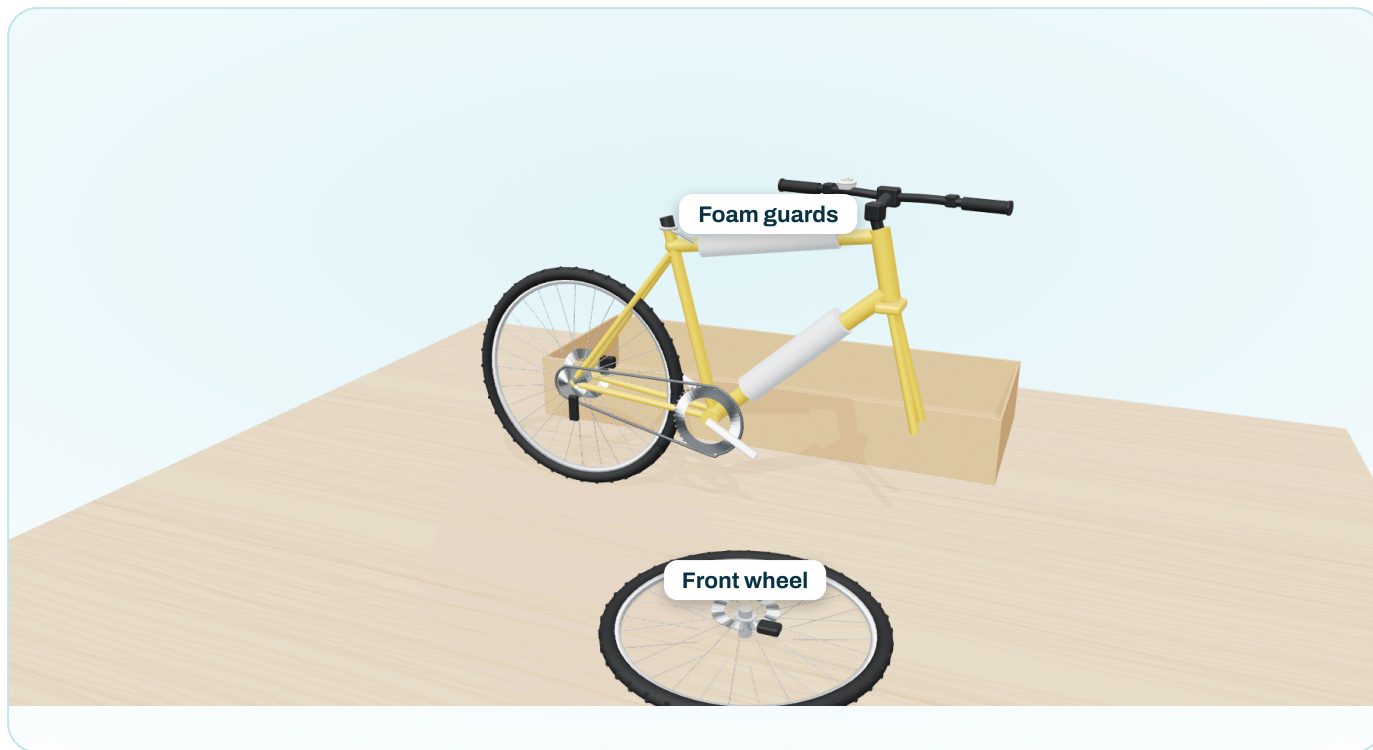

2

Fit the front wheel

Seat the wheel axle in the fork. Close the lever until it is firm: it should leave a mark on your palm.



Scan to hear this step

✗ **Not like this: an open lever lets the wheel come off over a bump.**



✓ **Like this**



3

Straighten the handlebar

Turn the handlebar until it lines up with the front wheel. Tighten the stem bolts with the hex key.



Scan to hear this step



4


Fit the pedals

The R pedal goes on the chain side and tightens clockwise. The L pedal has a reverse thread: it tightens counterclockwise.




Scan to hear this step

✗ Not like this: forcing the L pedal the wrong way strips the crank thread.

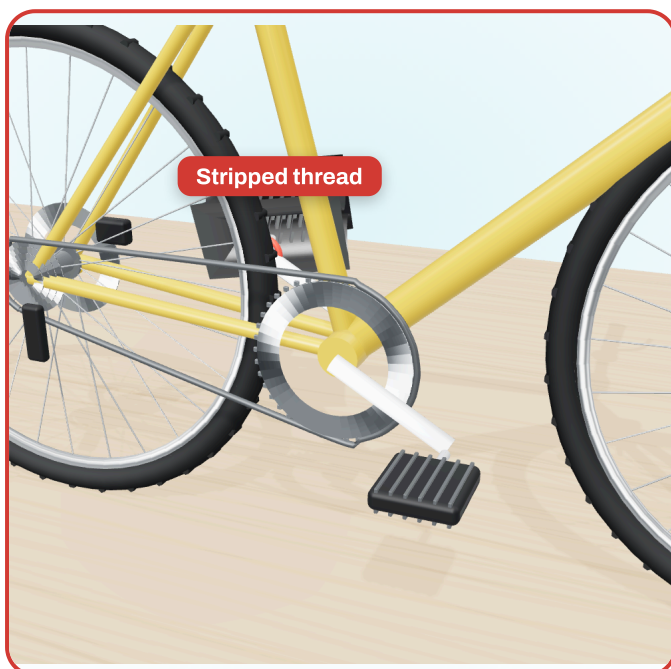

✓ Like this

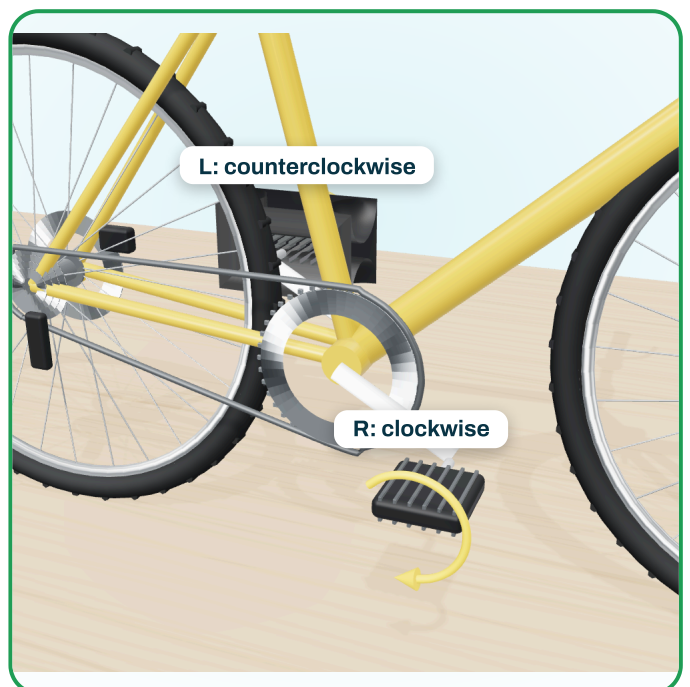

5

Fit the saddle

Slide the seat post into the frame. The minimum insertion mark must stay hidden inside the frame. Close the clamp.



Scan to hear this step



Not like this: with the mark showing, the seat post can crack the frame.



Like this




6

Pump up the tires

Pump the tires to the pressure printed on the side of the tire.



Scan to hear this step

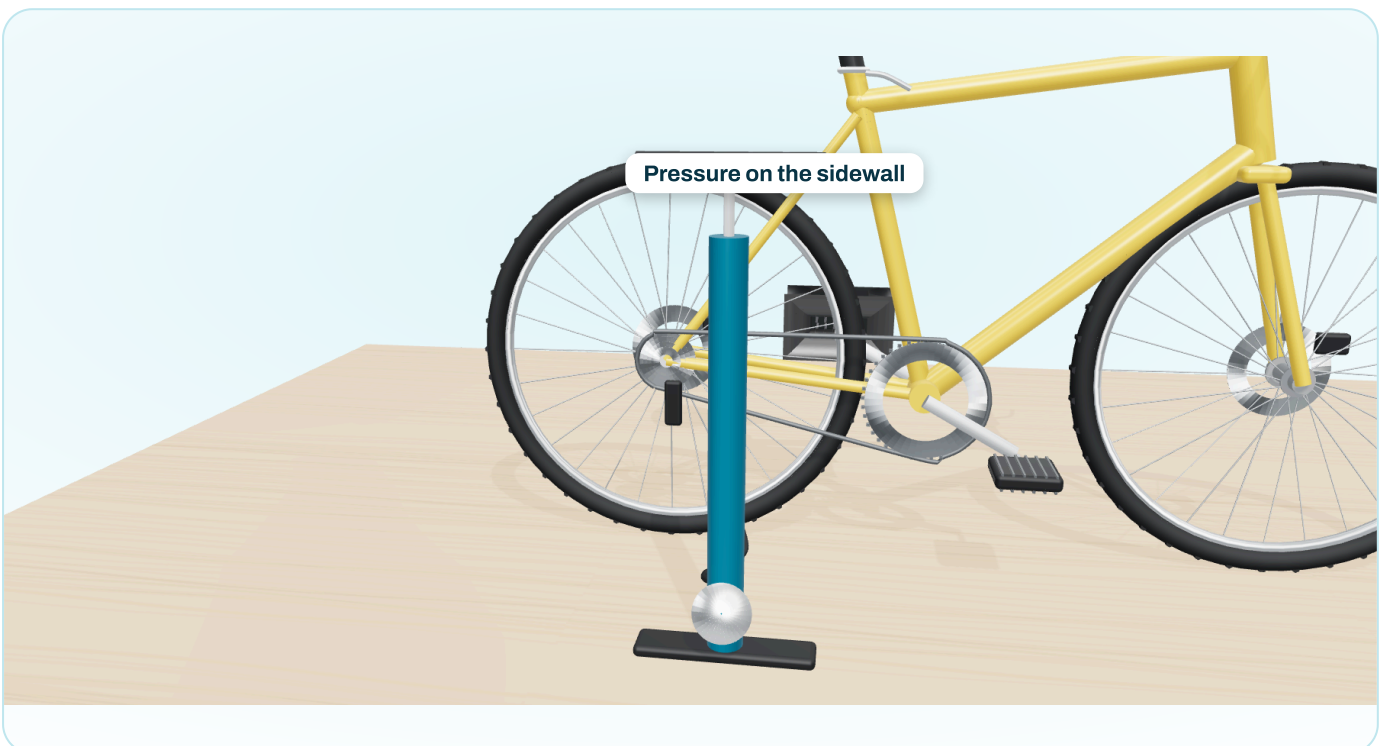

7

Check the brakes

Before you ride, squeeze both brake levers and push the bike. The wheels must not turn.



Scan to hear this step



Done!

Any questions left? Talk to Velora.



See the 3D manual on your phone